


TECHNICAL DATA SHEET

PRESTO®

Range: Shower heads

Ref: 29505 - Shower head with anti-limescale spikes with directional grid, PRESTOTEM 2 style

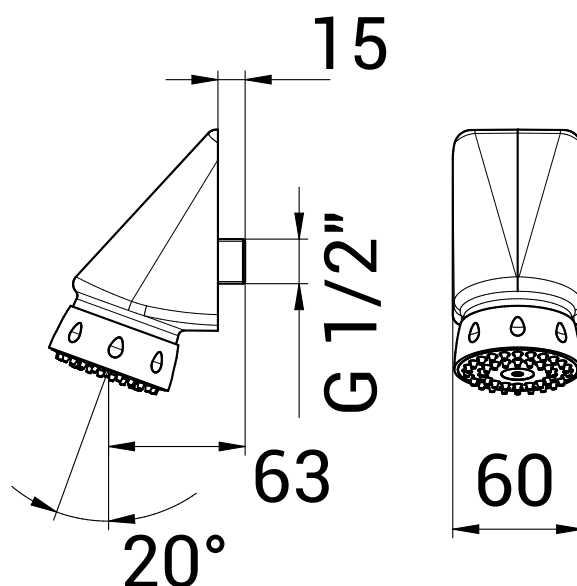

> Working pressure :

- 1 to 5 bar

> Flow :

- 10 l/min with integrated flow limiter

> Functionality :

- Simple rain spray
- Anti-Limescale spikes
- Fixed shower head with directional grid

> Hydraulic supply :

- M G 1/2" - Threaded length 15 mm

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Delivered with :

- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

